


RELEASING TO UNCLASSIFIED
 © 2016 COMMScope, INC. CONFIDENTIAL
 NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPRIETARY PROPERTY OF COMMScope, INC. AND MAY BE USED ONLY FOR THE SPECIFIC PURPOSE AUTHORIZED IN WRITING BY COMMScope, INC.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	ECR-14-008451	17Jun2014	LD	JS
	H	REV PER BNS_CD_BRAND	02FEB2017	GG	DC

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	22 AWG Solid
	Ø AWG RANGE in mm	0,610<=Ø<0,688
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,40
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	-
OVERALL SHIELD	BRAID MATERIAL	COPPER BRAID
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSFRZH
	OVERALL DIAMETER (D)	7,8 mm
PULLING FORCE	MAX.	100 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT7A S/FTP XG SOLID PR04 AWG22 compliant to IEC 61156-7 LSFRZH
3. CABLE COLORED TYPES UPON REQUEST.

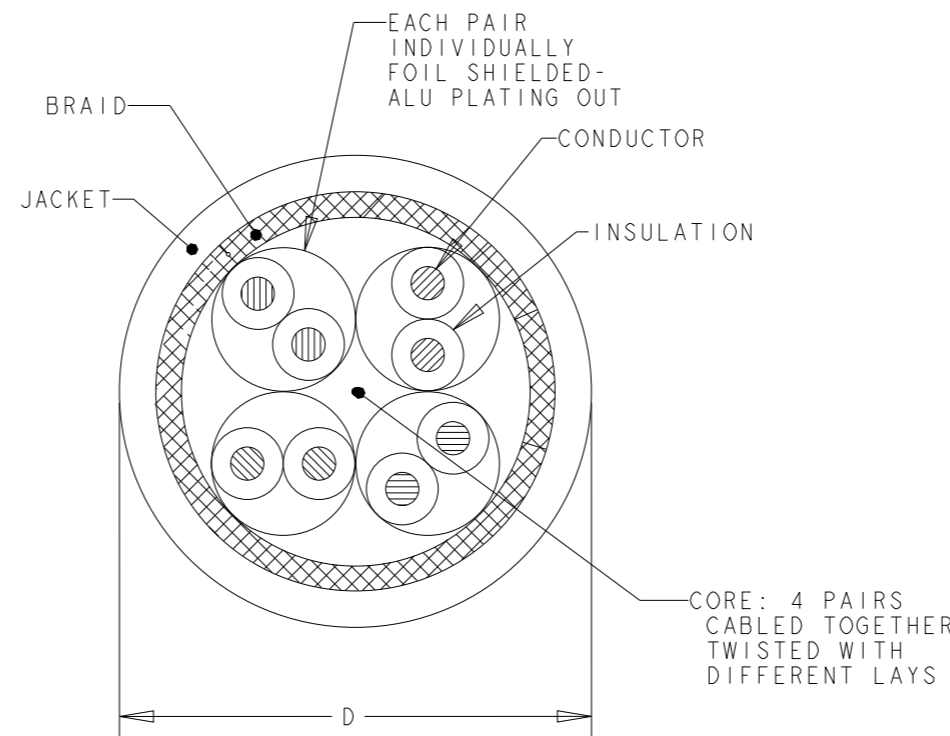

WHITE	500	REEL	1499101-2
WHITE	1000	REEL	1499101-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	01Mar2013
DIMENSIONS: mm		CHK	01Mar2013
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	01Mar2013
0 PLC	±-	PRODUCT SPEC	
1 PLC	±-	-	
2 PLC	±-	APPLICATION SPEC	
3 PLC	±-	-	
4 PLC	±-	WEIGHT	
ANGLES	±-	-	
MATERIAL	FINISH	CUSTOMER DRAWING	
-	-	SCALE NTS SHEET 1 OF 1 REV H	

COMMScope, INC.

NAME: CABLE, CAT7A, S/FTP, PIMF1200, XG, SOLID, PR04, AWG22, LSFRZH

SIZE: A3 CAGE CODE: - DRAWING NO: C-1499101 RESTRICTED TO: -