

319072-000 | FIST-SOSA2-2R4/8-S

FIST® Splice Sub-assembly kit with 2 trays, each for holding up to 2 4-strip ribbon or 1 8-strip ribbon fibers, with Heat Shrink type splice holder

- Splice sub-assemblies consists of a wraparound groove plate holding the included splice organizer trays
- Groove plates are designed with slots for routing fiber to and from the organizer trays
- Loop-back facility allowing for single circuit uncut looped fiber storage on the splice tray
- Compliant with most splice types and independent of any optical fiber construction

Product Classification

Regional Availability	EMEA
Product Type	Fiber splice tray
Product Brand	FIST®
Product Series	FIST-SOSA2

General Specifications

Application	For use with BUDI fiber wall boxes For use with FIST fiber splice closures For use with FIST fiber splice panels
Color	Gray
Splice Tray Chip Type	Heat shrink
Splice Tray Construction	R4/8 (for up to 2 ribbon 4 or 1 ribbon 8 strips)
Splice Tray Included, quantity	2
Splices per Tray, note	1 mass splice (8-ribbon) per tray 2 mass splices (4-ribbon) per tray
Splices per Tray, quantity	3
Used UMS Units, quantity	2


Dimensions

Height	8 mm 0.315 in
Width	104 mm 4.094 in
Length	152 mm 5.984 in
Fiber Storage Length, maximum	2050 mm for 4-ribbon fibers 2050 mm for 8-ribbon fibers
Fiber Storage Length, minimum	650 mm 25.591 in
Splice Protector Length, maximum	45 mm 1.772 in
Splice Protector Length, minimum	35 mm 1.378 in
Splice Protector Diameter, maximum	5 mm 0.197 in

319072-000 | FIST-SOSA2-2R4/8-S

Splice Protector Diameter, minimum 3.5 mm | 0.138 in

Dimension Drawing

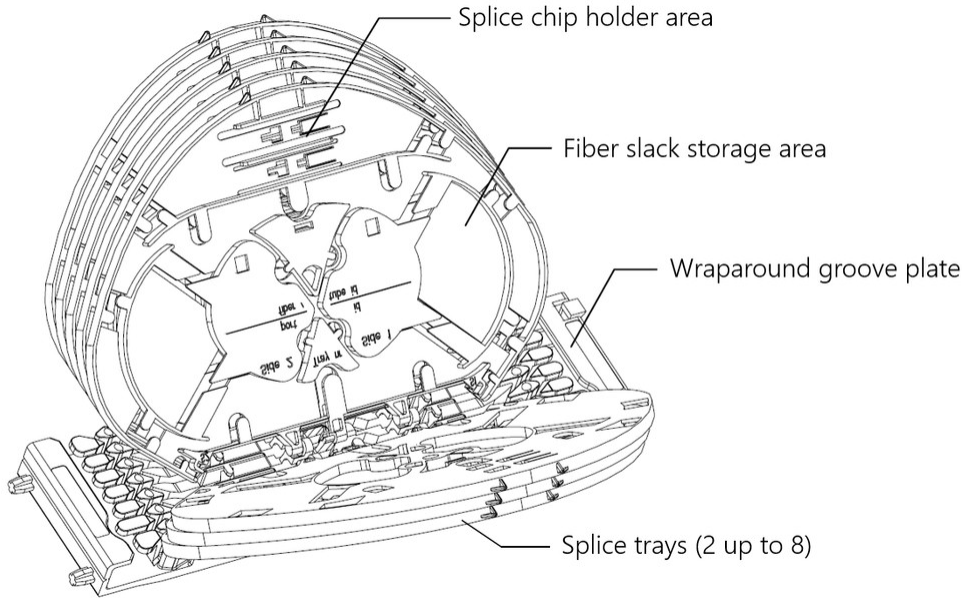

Material Specifications

Material Type PBT | PET

Mechanical Specifications

Minimum Bend Radius, standard 30 mm | 1.181 in

Environmental Specifications

Storage Temperature -40 °C to +70 °C (-40 °F to +158 °F)

Relative Humidity 93%, non-condensing

Environmental Space Indoor | Outdoor

Packaging and Weights

Packaging quantity 1

Packaging Type Bag | Carton

Weight, net 0.1 kg | 0.22 lb

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

REACH-SVHC

ROHS

UK-ROHS

**Classification**

Below maximum concentration value

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant

Compliant

* Footnotes

Used UMS Units, quantity The overall space consumed in the Universal Mounting System (UMS) frame is expressed in UMS units. One UMS unit equals 6 mm.